


[MY ACCOUNT](#)
[BLOG](#)

0 \$ 00.00

[Home](#) > [Steel Adapters](#) > [37 Degree JIC](#) >

2408 -37° JIC MALE TUBE PLUG



JIC Male



Alternative Views:



37° JIC Male Tube Plug

2408 JIC equivalent to the following:

- * SAE 070109
- * Aeroquip 900599
- * Parker PNTX
- * Parker 03CP
- * Weatherhead C54229

Available in stainless steel: SS-2408



PRESSURE
RATINGS



DIMENSIONAL
DRAWINGS



CROSS
REFERENCE

37° JIC MALE TUBE PLUG

[PRINT PAGE](#)

ITEM#	ITEM NAME	OUR PRICE	QTY	
2408-02	2408-02 - JIC 37° Tube Plug, 1/8" Tube O.D.	\$2.16		
2408-03	2408-03 - JIC 37° Tube Plug, 3/16" Tube O.D.	\$2.16		
2408-04	2408-04 - JIC 37° Tube Plug, 1/4" Tube O.D.	\$0.34		
2408-05	2408-05 - JIC 37° Tube Plug, 5/16" Tube O.D.	\$0.61		
2408-06	2408-06 - JIC 37° Tube Plug, 3/8" Tube O.D.	\$0.42		

2408-08	2408-08 - JIC 37° Tube Plug, 1/2" Tube O.D.	\$0.62		
2408-10	2408-10 - JIC 37° Tube Plug, 5/8" Tube O.D.	\$0.90		
2408-12	2408-12 - JIC 37° Tube Plug, 3/4" Tube O.D.	\$1.62		
2408-14	2408-14 - JIC 37° Tube Plug, 7/8" Tube O.D.	\$3.15		
2408-16	2408-16 - JIC 37° Tube Plug, 1" Tube O.D.	\$2.12		
2408-20	2408-20 - JIC 37° Tube Plug, 1-1/4" Tube O.D.	\$3.61		
2408-24	2408-24 - JIC 37° Tube Plug, 1-1/2" Tube O.D.	\$8.76		
2408-32	2408-32 - JIC 37° Tube Plug, 2" Tube O.D.	\$23.94		

Check the items you wish to purchase, then click

ADD TO CART

Features

Material: High pressure carbon steel with zinc trivalent anti-corrosion coating SAE 37° JIC meets SAE J514 specifications and are used for petroleum and mineral oil based fluids in hydraulic applications

Product Details


Pressure Ratings:

SAE J514 Pressure Ratings					
Nom. SAE Dash Size	Nom. Tube O.D. Inches	37 Degree Flare Straight Thread	Nom. Pipe Size	SAE St. Threads Union & Bulkhead (PSI)	Fittings With Pipe Threads (PSI)
2	1/8	5/16"-24	1/8"	5000	5000
3	3/16	3/8"-24	1/8"	5000	5000
4	1/4	7/16"-20	1/8"	5000	5000
5	5/16	1/2"-20	1/8"	5000	5000
6	3/8	9/16"-18	1/4"	5000	5000

8	1/2	3/4"-16	3/8"	4500	4000
10	5/8	7/8"-14	1/2"	3500	3000
12	3/4	1 1/16"-12	3/4"	3500	3000
14	7/8	1 3/16"-12	3/4"	3000	2500
16	1	1 5/16"-12	1"	3000	2000
20	1 1/4	1 5/8"-12	1 1/4"	2500	1150
24	1 1/2	1 7/8"-12	1 1/2"	2000	1000
32	2	2 1/2"-12	2"	1500	1000

NOTE: Since many factors influence the pressure at which a system will or will not perform satisfactory, values shown in this table should not be construed as guaranteed minimum.

Dimensional Drawings:

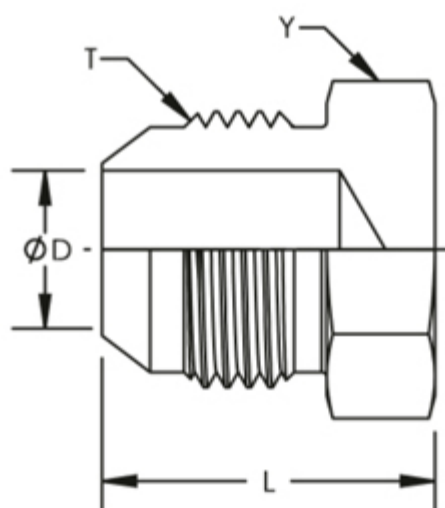

Product ID	Y HEX	T	D	L
SS-2408-02	0.438	5/16-24	0.063	0.7
SS-2408-03	0.438	3/8-24	0.125	0.73
SS-2408-04	0.5	7/16-20	0.172	0.8
SS-2408-05	0.563	1/2-20	0.234	0.8
SS-2408-06	0.625	9/16-18	0.297	0.84
SS-2408-08	0.813	3/4-16	0.391	0.94
SS-2408-10	0.938	7/8-14	0.484	1.1
SS-2408-12	1.125	1-1/16-12	0.609	1.28
SS-2408-14	1.25	1-3/16-12	0.719	1.31
SS-2408-16	1.375	1-5/16-12	0.844	1.33
SS-2408-20	1.688	1-5/8-12	1.078	1.45
SS-2408-24	2	1-7/8-12	1.313	1.65

SS-2408-32	2.625	2-1/2-12	1.781	2.05
------------	-------	----------	-------	------

Competitor Cross Reference:

INTERCHANGEABLE WITH:					
SHF	AEROQUIP	PARKER	SSP	SAE	MS
2408-02	259-900599-2	2 PNTX-SS	J2P	70109	MS51518
2408-03	259-900599-3	3 PNTX-SS	J3P	70109	MS51518
2408-04	259-900599-4	4 PNTX-SS	J4P	70109	MS51518
2408-05	259-900599-5	5 PNTX-SS	J5P	70109	MS51518
2408-06	259-900599-6	6 PNTX-SS	J6P	70109	MS51518
2408-08	259-900599-8	8 PNTX-SS	J8P	70109	MS51518
2408-10	259-900599-10	10 PNTX-SS	J10P	70109	MS51518
2408-12	259-900599-12	12 PNTX-SS	J12P	70109	MS51518
2408-14	259-900599-14	14 PNTX-SS	J14P	70109	MS51518
2408-16	259-900599-16	16 PNTX-SS	J16P	70109	MS51518
2408-20	259-900599-20	20 PNTX-SS	J20P	70109	MS51518
2408-24	259-900599-24	24 PNTX-SS	J24P	70109	MS51518
2408-32	259-900599-32	32 PNTX-SS	J32P	70109	MS51518

Share your knowledge of this product. Be the first to write a review »

ABOUT US

Company Info
Contact Us
Careers
Reference Center

MY ACCOUNT

View Cart
Sign-In
Order Status

PRODUCTS

Product Index
Category Index

HELPFUL INFO


Shipping & Returns
Privacy Policy
Terms & Conditions
Warranty

QUESTIONS? CALL OR TEXT US!

Tel: (866) 620-7320
Email:
sales@hydraulicsdirect.com

Copyright 52563 Hydraulics Direct

FOLLOW US



TRUSTED SELLER

